


Accent (1400/1000/800)


Transferring Data between the Device and Emulation Software

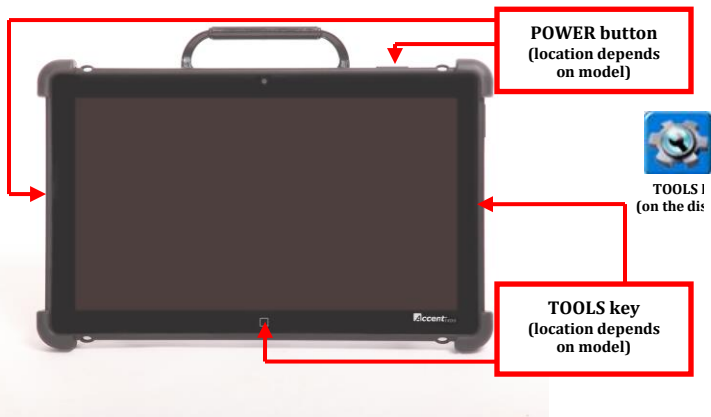

Loading the data into your computer from a USB stick.

- Insert your USB stick into the computer
- Open the Emulation Software
- Press Toolbox (F9)
- Select Transfer Memory Menu
- Select Load Entire Device Contents
- Navigate to the USB stick and choose your file.
- Press Open
- Press OK
- Press OK
- Press GO TO HOME.

You may need to choose the correct area to view the program

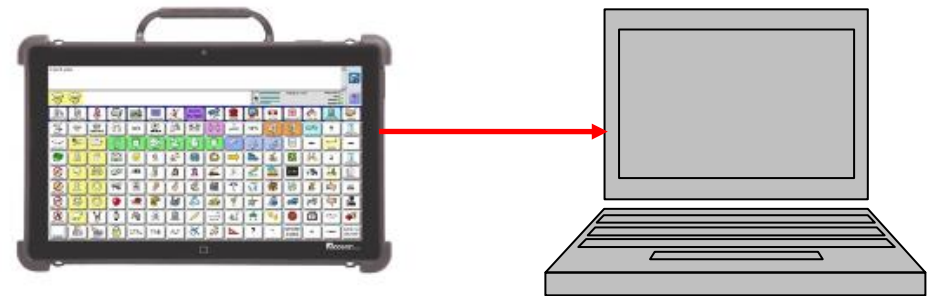

From Device to PC emulation (Pass) Software

Saving the data from your device to a USB stick.

- Insert your USB stick into the Accent device
- Press the Tools/Home Key
- Press Toolbox
- Select Transfer Memory Menu
- Select Save Entire Device Contents
- Type name for the save
- Press OK and wait
- Press OK
- Press OK
- Press GO TO HOME

How to switch to the correct user area.

- Press Toolbox (F9)
- Select User Area Menu
- Select Switch User Area
- Choose the area with your data to go to
- Press OK
- Press GOTO HOME

From Device to PC emulation (Pass) Software

Saving the data from your PC Emulation (PASS) Software to a USB stick.

- Insert your USB stick into the computer
- Go to Toolbox (F9)
- Select Transfer Memory Menu
- Select Save Entire Device Contents
- Navigate to the USB stick
- Type a name for the save
- Press OK and wait
- Press OK
- Press OK
- Press GOTO HOME.

Loading the data onto your device from a USB stick.

- Insert your USB stick into the Accent device
- Press the Tools Key
- Select Toolbox
- Select Transfer Memory Menu
- Select Load Entire Device Contents
- Choose the file to load
- Press OK
- Press OK
- Press OK
- Press GOTO HOME.

You may need to choose the correct area to view the program



How to switch to the correct user area.

- Press Toolbox (F9)
- Select User Area Menu
- Select Switch User Area
- Choose the area with your data to go to
- Press OK
- Press GOTO HOME

**** Now you can view the changes made on the Emulation Software on the device**

Liberator contacts

Technical Support:
01733 370470 (Option 2)
info@liberator.co.uk

Address:
Liberator Ltd
Whitegates
High Street
Swinstead
NG33 4PA